ARMORED FORD F-350 SRW 4X4 CREW CAB LARIAT

NEW GENERATION BODY STYLE





AGAINST 7.62 x 39mm, 5.56 x 45mm, 7.62 x 51mm







ALPINE ARMORING INC.

GENERAL SPECIFICATIONS

MAKE: FORD

MODEL: F350 SRW CREW CAB LARIAT

TRIM: Lariat Package

YEAR: 2023

ENGINE: 6.7L Power Stroke V8 Diesel

POWER: 475 hp – Torque 1,050 LB-FT

TRANSMISSION: 10-Speed Automatic Torqshift

COLOR: Agate Black

INTERIOR: Black Onyx Leather

SEATING: 2 + 3

FINAL WEIGHT: 9,960 lbs (4,517 kg.) Armored

HEIGHT: **81.5 in.**

(207 cm)

WIDTH:

80 in.

(203 cm)

LENGTH:

250 in.

(635 cm)

WHEELBASE:

160 in.

(406 cm)







* Tel: +1.703.471.0002 * Fax: +1.703.471.0202 * www.AlpineCo.com * Sales@AlpineCo.com *



Firewall

Minimal-piece Ballistic steel firewall provides protection up front.

3-1

Roof

Lined and seam welded with ballistic steel for protection against angled projectiles.

3-





Floor

Lined with ballistic steel to protect against explosive threats.

3-3

Doors

Lined with ballistic steel to stop any side and vertical threats.

3-





Battery Protection

Fully enclosed in serviceable ballistic steel casings.

3-5

Rear Cabin

Customized ballistic rear cabin with the viewing window installed.

3-





Overlaps

All doors, vertical panels, and windows feature ballistic steel overlaps to keep shrapnel from entering the cabin.

3-7

Front Wheel Wells

Lined with ballistic steel to prevent against penetration.

3-8







this image is property of Alpine Armoring

Glass Armor

Minimum 40 mm thick glass/polycarbonate composite A9/NIJ III transparent armor installed on the vehicle.

4-1



Anti-Spall Layer

Inner-most anti-spall layer prevents glass and bullet fragments from penetrating into passenger cabin area and is free of any optical distortion and discoloration.



Multi-Hit Protection


All windows are capable of sustaining multiple hits while providing protection to passengers.

4-3



Front Power Windows

The front 2 windows are equipped with special custom-designed heavy duty actuator mechanism to allow for faster and quicker operation with maximum traveling distance.

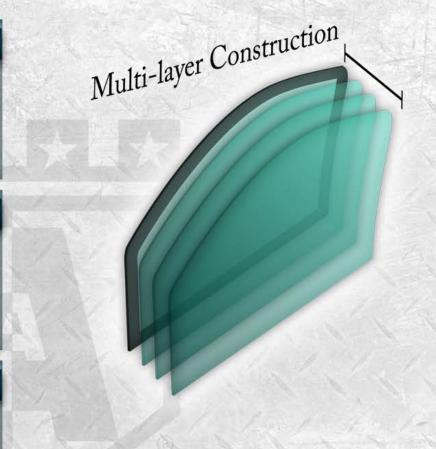







Ballistic Door Overlap

Each door is equipped with ballistic steel overlap with added custom bullet-catchers wrapped in high quality leather or vinyl.

5-1

Upgraded Braking

The vehicle's braking system (rotors & pads) will be upgraded to accommodate the added armor weight.








Power Windows

The front driver and passenger window are powered and lower approximately 4 - 8 inches.

5-2

Fuel Tank Protection

Fuel tank is protected by a ballistic steel box. Protects from two simultaneous grenades.

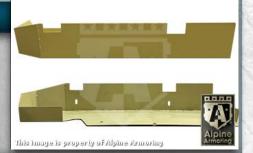



This image is property of Alpine Armoring

PA Speaker

Amplifier Police Siren & Metal Ultra Slime Octagon Compact Flat Speaker DC12V 100W Multi-Tones Wired Control with Mic Loudspeaker Emergency Electronic PA. 5-3

Run-Flat Inserts

Vehicle will be equipped with full-size run-flat inserts in each tire.

5-7



Tailpipe Protection

The tailpipe features a special mesh that prevents the tailpipe from being sabotaged.

5-4



Upgraded front and rear Anti-Sway bars are installed to decrease body roll.





This image is properly of Alpine Armoring

2nd Battery Protection

The second battery is encased in a ballistic steel box for protection.

6-1

Reinforced Door Hinges

Vehicle will be equipped with state-of-the-art Heavy-Duty (HD) hinges that have a built-in door stopper, preventing the use of retaining straps and door swing... 6-5





P.A./Multi-Siren System

Located on the center console. The multi-siren features standard siren tones, volume adjustment, and a public address system.

6-2

Mic Intercom

Added center gunport and manual interior release access for rear hatch included.







Strobe Lights

Two white strobe lights are mounted in the front grill. Controlled using the P.A./siren control unit in the center console.

6-3

Rear Glass

The rear cabin of the vehicle is reinforced with ballistic glass





P.A./Multi-Siren System

Located on the front dashboard. The multi-siren features standard siren tones, volume adjustment, and a public address system.

6-4

OEM Appearance

The exterior of the vehicle with the Armoring conversion will maintain the OEM appearance of the factory vehicle.













































ALPINE ARMORING'S BALLISTIC CHART

TA)											"no one protects you better"	
WEAPONS	SPECS			LEVELS					BULLETS			
WEAPUNS	ТҮРЕ	CALIBER (mm)	CLASS	STANAG	UL	ALPINE	NIJ	CEN	MASS (g)	MATERIAL	VELOCITY	NUMBER OF SHOTS
	.38 Special	9 x 19	Handgun		1	A1	I.II.IIA	-	8.00	TCC1	358 M/S	
	.357 Magnum	9 x 33	Handgun		2	A2	I.IIA	B1 & B3	10.20	JSP	430 M/S	5 —
	.44 Magnum	11 x 33	Handgun	-	3	АЗ	IIIA	B4	15.60	LWC	440 M/S	-i
77	MP5	9 x 19	SMG	-	6	A4	IIIA	B2	8.00	ICO	427 M/S	, —
	Shotgun	12 Gauge	Shotgun	-	3 & 4	Aŝ	IIIA	SG2	28.30	SLUG	503 M/S	3
	Tokarev	7.62 x 25	Handgun	-	-	A5	IIIA	-	5.50	LCSJ	488 M/s	5
-	Kalashnikov (AK-47)	7.62 x 39	Assault Rifle	-	-	A6	III	B5	9.70	SCCI	732 M/s	
-	Kalashnikov (AK-47 Military)	7.62 x 39 API BZ	Assault Rifle	H	-	A7	_	B5+	11.70	SCC1	774 M/s	
Par	M16/AR-15	5.56 x 45 NATO SS109 5.56 x 45 NATO Ball	Assault Rifle	1	7	A8	IV	B5	4.00	rcc) 2CC)	900 M/s 833 M/s	3
Management .	Winchester .308	7.62 x 51	Rifle	1	7	A9	III	B6	10.90	rccı	810 M/s	5
	Remington 700 SPS	7/2 × 63 AP (30-06)	High-Power Rifle	111	5 & 8	A10	IV	B7-	10.80 8.40	AP	869 M/S 930 M/S	5
	Dragunov	7.62 x 54R B32 API	Sniper Rifle	111	-	A11	IV+	B7+	10.04	SCC1	854 M/S	
	.50 Cal	12.7 × 99	High-Power Rifle	IV	10	A12	-	-	45.00	CI	908 M/S	



UL Underwriters Laboratory, 752

NIJ National Institute of Justice, 0108.01

CEN European Standard

STANAG ... NATO's Standard (STANAG 4569)

ALPINE Alpine Armoring's Certified Standard

LCCJ Lead Core Copper Jacket

JSP Jacketed Soft Point LWC Lead Wad Cutter

LCSJ Lead Core Steel Jacket SCCJ Steel Core Copper Jacket

AP Armor Piercing

SG Shotgun

Shots (5) 11.4 cm Square Pattern (Corners & Center)

Shots (3) 11.4 cm Triangular Pattern Velocity Minimum Measured Velocity

NIJ Rating .. Levels I, II, IIA, & IIIA (based on 1 of 2 required calibers of ballistic threat)





